


CILINDRO DOPPIO EFFETTO – DOUBLE ACTING CYLINDER

| Code (Codice) | Ø AL | Ø D | Ø S | STROKE (Corsa) | L | C | L1 | L2 | E | Weight Kg |
|--------------------|------|-----|-----|----------------|-----|----|----|----|------|-----------|
| C2A0160050G | 25 | 35 | 16 | 50 | 135 | 17 | 33 | 15 | 1/4" | 0,70 |
| C2A0160100G | 25 | 35 | 16 | 100 | 185 | 17 | 33 | 15 | 1/4" | 0,95 |
| C2A0160150G | 25 | 35 | 16 | 150 | 235 | 17 | 33 | 15 | 1/4" | 1,25 |
| C2A0160200G | 25 | 35 | 16 | 200 | 285 | 17 | 33 | 15 | 1/4" | 1,50 |
| C2B0200050G | 32 | 42 | 20 | 50 | 155 | 16 | 33 | 20 | 1/4" | 1,,3 |
| C2B0200100G | 32 | 42 | 20 | 100 | 205 | 16 | 33 | 20 | 1/4" | 1,60 |
| C2B0200150G | 32 | 42 | 20 | 150 | 255 | 16 | 33 | 20 | 1/4" | 1,95 |
| C2B0500200G | 32 | 42 | 20 | 200 | 305 | 16 | 33 | 20 | 1/4" | 2,30 |
| C2B0500250G | 32 | 42 | 20 | 250 | 355 | 16 | 33 | 20 | 1/4" | 2,70 |
| C2B0200300G | 32 | 42 | 20 | 300 | 405 | 16 | 33 | 20 | 1/4" | 3,00 |
| C2B0200400G | 32 | 42 | 20 | 400 | 505 | 16 | 33 | 20 | 1/4" | 3,70 |
| C2B0200500G | 32 | 42 | 20 | 500 | 605 | 16 | 33 | 20 | 1/4" | 4,40 |
| C2C0200100G | 40 | 50 | 20 | 100 | 230 | 22 | 40 | 23 | 1/4" | 2,27 |
| C2C0200150G | 40 | 50 | 20 | 150 | 280 | 22 | 40 | 23 | 1/4" | 2,67 |
| C2C0200200G | 40 | 50 | 20 | 200 | 330 | 22 | 40 | 23 | 1/4" | 3,05 |
| C2C0200250G | 40 | 50 | 20 | 250 | 380 | 22 | 40 | 23 | 1/4" | 3,45 |
| C2C0200300G | 40 | 50 | 20 | 300 | 430 | 22 | 40 | 23 | 1/4" | 3,85 |
| C2C0200350G | 40 | 50 | 20 | 350 | 480 | 22 | 40 | 23 | 1/4" | 4,27 |
| C2C0200400G | 40 | 50 | 20 | 400 | 530 | 22 | 40 | 23 | 1/4" | 4,65 |
| C2C0200450G | 40 | 50 | 20 | 450 | 580 | 22 | 40 | 23 | 1/4" | 5,08 |
| C2C0200500G | 40 | 50 | 20 | 500 | 630 | 22 | 40 | 23 | 1/4" | 5,49 |
| C2C0250100G | 40 | 50 | 25 | 100 | 230 | 22 | 40 | 23 | 1/4" | 2,50 |
| C2C0250150G | 40 | 50 | 25 | 150 | 280 | 22 | 40 | 23 | 1/4" | 2,95 |
| C2C0250200G | 40 | 50 | 25 | 200 | 330 | 22 | 40 | 23 | 1/4" | 3,39 |
| C2C0250250G | 40 | 50 | 25 | 250 | 380 | 22 | 40 | 23 | 1/4" | 3,85 |
| C2C0250300G | 40 | 50 | 25 | 300 | 430 | 22 | 40 | 23 | 1/4" | 4,32 |
| C2C0250350G | 40 | 50 | 25 | 350 | 480 | 22 | 40 | 23 | 1/4" | 4,79 |
| C2C0250400G | 40 | 50 | 25 | 400 | 530 | 22 | 40 | 23 | 1/4" | 5,26 |
| C2C0250450G | 40 | 50 | 25 | 450 | 580 | 22 | 40 | 23 | 1/4" | 5,72 |
| C2C0250500G | 40 | 50 | 25 | 500 | 630 | 22 | 40 | 23 | 1/4" | 6,20 |
| C2C025550G0 | 40 | 50 | 25 | 550 | 680 | 22 | 40 | 23 | 1/4" | 6,60 |

Top Speed (Limite di Velocità): 0.5m/s max.

Continuous Pressure (Pressione Continua): 140bar max.
Peak Pressure (Pressione di picco): 250bar max.

Temperature C°: -25°C + 80°C

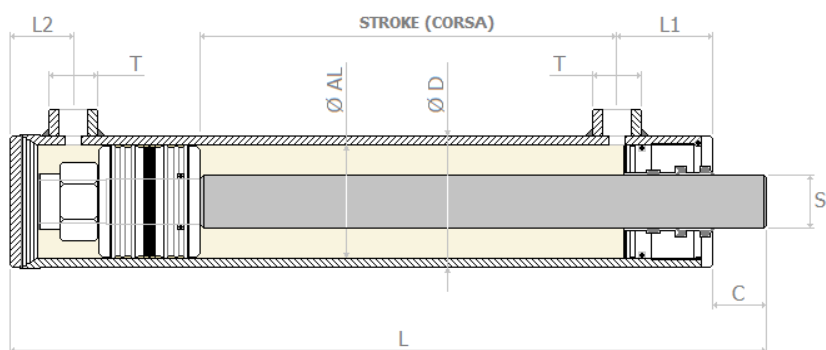


CILINDRO DOPPIO EFFETTO – DOUBLE ACTING CYLINDER

| Code (Codice) | Ø AL | Ø D | Ø S | STROKE (Corsa) | L | C | L1 | L2 | E | Weight Kg |
|--------------------|------|-----|-----|----------------|------|----|----|----|------|-----------|
| C2C0250600G | 40 | 50 | 25 | 600 | 730 | 22 | 40 | 23 | 1/4" | 7,13 |
| C2D0250100G | 50 | 60 | 25 | 100 | 240 | 22 | 43 | 26 | 3/8" | 3,29 |
| C2D0250150G | 50 | 60 | 25 | 150 | 290 | 22 | 43 | 26 | 3/8" | 3,83 |
| C2D0250200G | 50 | 60 | 25 | 200 | 340 | 22 | 43 | 26 | 3/8" | 4,34 |
| C2D0250250G | 50 | 60 | 25 | 250 | 390 | 22 | 43 | 26 | 3/8" | 4,85 |
| C2D0250300G | 50 | 60 | 25 | 300 | 440 | 22 | 43 | 26 | 3/8" | 5,35 |
| C2D0250350G | 50 | 60 | 25 | 350 | 490 | 22 | 43 | 26 | 3/8" | 5,94 |
| C2D0250400G | 50 | 60 | 25 | 400 | 540 | 22 | 43 | 26 | 3/8" | 6,40 |
| C2D0250450G | 50 | 60 | 25 | 450 | 590 | 22 | 43 | 26 | 3/8" | 7,30 |
| C2D0250500G | 50 | 60 | 25 | 500 | 640 | 22 | 43 | 26 | 3/8" | 7,43 |
| C2D0250550G | 50 | 60 | 25 | 550 | 690 | 22 | 43 | 26 | 3/8" | 8,06 |
| C2D0250600G | 50 | 60 | 25 | 600 | 740 | 22 | 43 | 26 | 3/8" | 8,46 |
| C2D0250800G | 50 | 60 | 25 | 800 | 940 | 22 | 43 | 26 | 3/8" | 10,71 |
| C2D0251000G | 50 | 60 | 25 | 1000 | 1140 | 22 | 43 | 26 | 3/8" | 12,87 |
| C2D0300150G | 50 | 60 | 30 | 150 | 290 | 22 | 43 | 26 | 3/8" | 4,11 |
| C2D0300200G | 50 | 60 | 30 | 200 | 340 | 22 | 43 | 26 | 3/8" | 4,74 |
| C2D0300250G | 50 | 60 | 30 | 250 | 390 | 22 | 43 | 26 | 3/8" | 5,35 |
| C2D0300300G | 50 | 60 | 30 | 300 | 440 | 22 | 43 | 26 | 3/8" | 5,97 |
| C2D0300350G | 50 | 60 | 30 | 350 | 490 | 22 | 43 | 26 | 3/8" | 6,55 |
| C2D0300400G | 50 | 60 | 30 | 400 | 540 | 22 | 43 | 26 | 3/8" | 7,20 |
| C2D0300450G | 50 | 60 | 30 | 450 | 590 | 22 | 43 | 26 | 3/8" | 7,80 |
| C2D0300500G | 50 | 60 | 30 | 500 | 640 | 22 | 43 | 26 | 3/8" | 8,42 |
| C2D0300550G | 50 | 60 | 30 | 550 | 690 | 22 | 43 | 26 | 3/8" | 9,04 |
| C2D0300600G | 50 | 60 | 30 | 600 | 740 | 22 | 43 | 26 | 3/8" | 9,64 |
| C2D0300700G | 50 | 60 | 30 | 700 | 840 | 22 | 43 | 26 | 3/8" | 10,85 |
| C2D0300800G | 50 | 60 | 30 | 800 | 940 | 22 | 43 | 26 | 3/8" | 12,10 |
| C2D0301000G | 50 | 60 | 30 | 1000 | 1140 | 22 | 43 | 26 | 3/8" | 14,57 |
| C2E0300100G | 60 | 70 | 30 | 100 | 260 | 23 | 50 | 30 | 3/8" | 4,82 |
| C2E0300150G | 60 | 70 | 30 | 150 | 310 | 23 | 50 | 30 | 3/8" | 5,55 |
| C2E0300200G | 60 | 70 | 30 | 200 | 360 | 23 | 50 | 30 | 3/8" | 6,20 |
| C2E0300250G | 60 | 70 | 30 | 250 | 410 | 23 | 50 | 30 | 3/8" | 6,87 |

Top Speed (Limite di Velocità): 0.5m/s max.

Continuous Pressure (Pressione Continua): 140bar max.
Peak Pressure (Pressione di picco): 250bar max.

Temperature C°: -25°C + 80°C

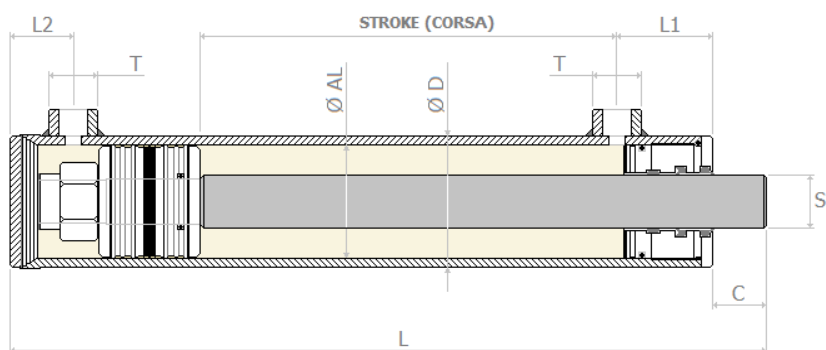


CILINDRO DOPPIO EFFETTO – DOUBLE ACTING CYLINDER

| Code (Codice) | Ø AL | Ø D | Ø S | STROKE (Corsa) | L | C | L1 | L2 | E | Weight Kg |
|--------------------|------|-----|-----|----------------|------|----|----|----|------|-----------|
| C2E0300300G | 60 | 70 | 30 | 300 | 460 | 23 | 50 | 30 | 3/8" | 7,55 |
| C2E0300350G | 60 | 70 | 30 | 350 | 510 | 23 | 50 | 30 | 3/8" | 8,20 |
| C2E0300400G | 60 | 70 | 30 | 400 | 560 | 23 | 50 | 30 | 3/8" | 8,90 |
| C2E0300450G | 60 | 70 | 30 | 450 | 610 | 23 | 50 | 30 | 3/8" | 9,53 |
| C2E0300500G | 60 | 70 | 30 | 500 | 660 | 23 | 50 | 30 | 3/8" | 10,25 |
| C2E0300550G | 60 | 70 | 30 | 550 | 710 | 23 | 50 | 30 | 3/8" | 10,86 |
| C2E0300600G | 60 | 70 | 30 | 600 | 760 | 23 | 50 | 30 | 3/8" | 11,60 |
| C2E0300800G | 60 | 70 | 30 | 800 | 960 | 23 | 50 | 30 | 3/8" | 14,26 |
| C2E0301000G | 60 | 70 | 30 | 1000 | 1160 | 23 | 50 | 30 | 3/8" | 17,00 |
| C2E0350100G | 60 | 70 | 35 | 100 | 260 | 23 | 50 | 30 | 3/8" | 5,07 |
| C2E0350150G | 60 | 70 | 35 | 150 | 310 | 23 | 50 | 30 | 3/8" | 5,85 |
| C2E0350200G | 60 | 70 | 35 | 200 | 360 | 23 | 50 | 30 | 3/8" | 6,60 |
| C2E0350250G | 60 | 70 | 35 | 250 | 410 | 23 | 50 | 30 | 3/8" | 7,40 |
| C2E0350300G | 60 | 70 | 35 | 300 | 460 | 23 | 50 | 30 | 3/8" | 8,15 |
| C2E0350350G | 60 | 70 | 35 | 350 | 510 | 23 | 50 | 30 | 3/8" | 8,94 |
| C2E0350400G | 60 | 70 | 35 | 400 | 560 | 23 | 50 | 30 | 3/8" | 9,72 |
| C2E0350450G | 60 | 70 | 35 | 450 | 610 | 23 | 50 | 30 | 3/8" | 10,47 |
| C2E0350500G | 60 | 70 | 35 | 500 | 660 | 23 | 50 | 30 | 3/8" | 11,25 |
| C2E0350550G | 60 | 70 | 35 | 550 | 710 | 23 | 50 | 30 | 3/8" | 12,00 |
| C2E0350600G | 60 | 70 | 35 | 600 | 760 | 23 | 50 | 30 | 3/8" | 12,81 |
| C2E0350800G | 60 | 70 | 35 | 800 | 960 | 23 | 50 | 30 | 3/8" | 15,87 |
| C2E0351000G | 60 | 70 | 35 | 1000 | 1160 | 23 | 50 | 30 | 3/8" | 18,93 |
| C2E0400200G | 60 | 70 | 40 | 200 | 360 | 23 | 50 | 30 | 3/8" | 7,25 |
| C2E0400250G | 60 | 70 | 40 | 250 | 410 | 23 | 50 | 30 | 3/8" | 8,14 |
| C2E0400300G | 60 | 70 | 40 | 300 | 460 | 23 | 50 | 30 | 3/8" | 9,03 |
| C2E0400350G | 60 | 70 | 40 | 350 | 510 | 23 | 50 | 30 | 3/8" | 9,90 |
| C2E0400400G | 60 | 70 | 40 | 400 | 560 | 23 | 50 | 30 | 3/8" | 10,79 |
| C2E0400450G | 60 | 70 | 40 | 450 | 610 | 23 | 50 | 30 | 3/8" | 11,64 |
| C2E0400500G | 60 | 70 | 40 | 500 | 660 | 23 | 50 | 30 | 3/8" | 12,52 |
| C2E0400550G | 60 | 70 | 40 | 550 | 710 | 23 | 50 | 30 | 3/8" | 13,45 |
| C2E0400600G | 60 | 70 | 40 | 600 | 760 | 23 | 50 | 30 | 3/8" | 14,30 |

Top Speed (Limite di Velocità): 0.5m/s max.

Continuous Pressure (Pressione Continua): 140bar max.
Peak Pressure (Pressione di picco): 250bar max.

Temperature C°: -25°C + 80°C

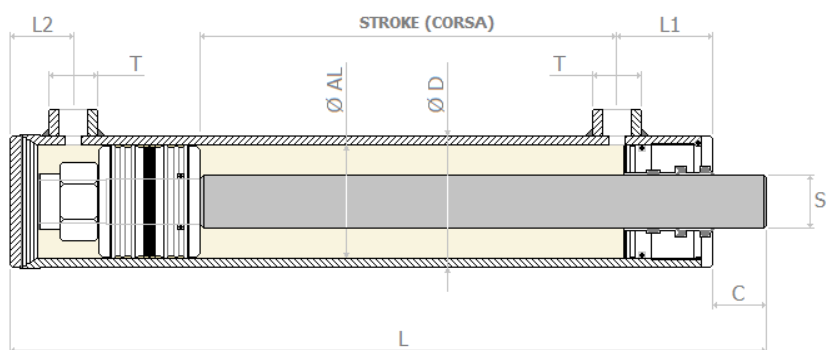


CILINDRO DOPPIO EFFETTO – DOUBLE ACTING CYLINDER

| Code (Codice) | Ø AL | Ø D | Ø S | STROKE (Corsa) | L | C | L1 | L2 | E | Weight Kg |
|--------------------|------|-----|-----|----------------|------|----|----|----|------|-----------|
| C2E0400800G | 60 | 70 | 40 | 800 | 960 | 23 | 50 | 30 | 3/8" | 17,82 |
| C2E0401000G | 60 | 70 | 40 | 1000 | 1160 | 23 | 50 | 30 | 3/8" | 21,40 |
| C2F0400200G | 63 | 73 | 40 | 200 | 360 | 23 | 50 | 30 | 3/8" | 7,60 |
| C2F0400250G | 63 | 73 | 40 | 250 | 410 | 23 | 50 | 30 | 3/8" | 8,50 |
| C2F0400300G | 63 | 73 | 40 | 300 | 460 | 23 | 50 | 30 | 3/8" | 9,40 |
| C2F0400350G | 63 | 73 | 40 | 350 | 510 | 23 | 50 | 30 | 3/8" | 10,30 |
| C2F0400400G | 63 | 73 | 40 | 400 | 560 | 23 | 50 | 30 | 3/8" | 11,20 |
| C2F0400450G | 63 | 73 | 40 | 450 | 610 | 23 | 50 | 30 | 3/8" | 12,10 |
| C2F0400500G | 63 | 73 | 40 | 500 | 660 | 23 | 50 | 30 | 3/8" | 13,00 |
| C2F0400550G | 63 | 73 | 40 | 550 | 710 | 23 | 50 | 30 | 3/8" | 13,90 |
| C2F0400600G | 63 | 73 | 40 | 600 | 760 | 23 | 50 | 30 | 3/8" | 14,80 |
| C2F0400800G | 63 | 73 | 40 | 800 | 960 | 23 | 50 | 30 | 3/8" | 18,50 |
| C2F0401000G | 63 | 73 | 40 | 1000 | 1160 | 23 | 50 | 30 | 3/8" | 22,10 |
| C2G0350100G | 70 | 80 | 35 | 100 | 260 | 23 | 50 | 33 | 3/8" | 6,09 |
| C2G0350150G | 70 | 80 | 35 | 150 | 310 | 23 | 50 | 33 | 3/8" | 6,95 |
| C2G0350200G | 70 | 80 | 35 | 200 | 360 | 23 | 50 | 33 | 3/8" | 7,74 |
| C2G0350250G | 70 | 80 | 35 | 250 | 410 | 23 | 50 | 33 | 3/8" | 8,60 |
| C2G0350300G | 70 | 80 | 35 | 300 | 460 | 23 | 50 | 33 | 3/8" | 9,40 |
| C2G0350350G | 70 | 80 | 35 | 350 | 510 | 23 | 50 | 33 | 3/8" | 10,26 |
| C2G0350400G | 70 | 80 | 35 | 400 | 560 | 23 | 50 | 33 | 3/8" | 11,00 |
| C2G0350450G | 70 | 80 | 35 | 450 | 610 | 23 | 50 | 33 | 3/8" | 11,88 |
| C2G0350500G | 70 | 80 | 35 | 500 | 660 | 23 | 50 | 33 | 3/8" | 12,60 |
| C2G0350550G | 70 | 80 | 35 | 550 | 710 | 23 | 50 | 33 | 3/8" | 13,66 |
| C2G0350600G | 70 | 80 | 35 | 600 | 760 | 23 | 50 | 33 | 3/8" | 14,20 |
| C2G0350800G | 70 | 80 | 35 | 800 | 960 | 23 | 50 | 33 | 3/8" | 17,56 |
| C2G0351000G | 70 | 80 | 35 | 1000 | 1160 | 23 | 50 | 33 | 3/8" | 21,26 |
| C2G0400200G | 70 | 80 | 40 | 200 | 360 | 23 | 50 | 33 | 3/8" | 8,28 |
| C2G0400250G | 70 | 80 | 40 | 250 | 410 | 23 | 50 | 33 | 3/8" | 9,26 |
| C2G0400300G | 70 | 80 | 40 | 300 | 460 | 23 | 50 | 33 | 3/8" | 10,24 |
| C2G0400350G | 70 | 80 | 40 | 350 | 510 | 23 | 50 | 33 | 3/8" | 11,20 |
| C2G0400400G | 70 | 80 | 40 | 400 | 560 | 23 | 50 | 33 | 3/8" | 12,80 |

Top Speed (Limite di Velocità): 0.5m/s max.

Continuous Pressure (Pressione Continua): 140bar max.
Peak Pressure (Pressione di picco): 250bar max.

Temperature C°: -25°C + 80°C

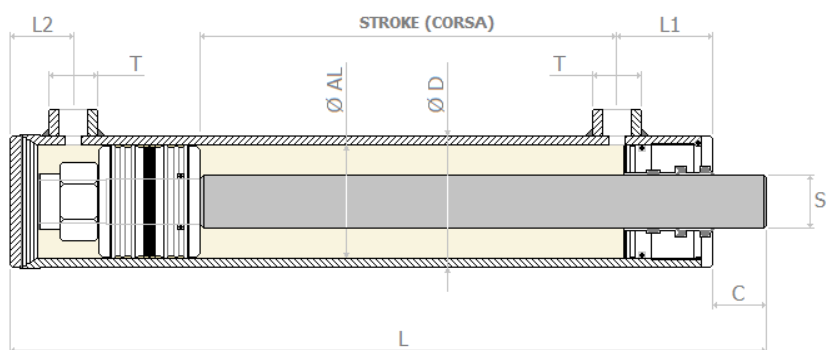


CILINDRO DOPPIO EFFETTO – DOUBLE ACTING CYLINDER

| Code (Codice) | Ø AL | Ø D | Ø S | STROKE (Corsa) | L | C | L1 | L2 | E | Weight Kg |
|--------------------|------|-----|-----|----------------|------|----|----|----|------|-----------|
| C2G0400450G | 70 | 80 | 40 | 450 | 610 | 23 | 50 | 33 | 3/8" | 13,11 |
| C2G0400500G | 70 | 80 | 40 | 500 | 660 | 23 | 50 | 33 | 3/8" | 14,01 |
| C2G0400550G | 70 | 80 | 40 | 550 | 710 | 23 | 50 | 33 | 3/8" | 15,10 |
| C2G0400600G | 70 | 80 | 40 | 600 | 760 | 23 | 50 | 33 | 3/8" | 15,99 |
| C2G0400800G | 70 | 80 | 40 | 800 | 960 | 23 | 50 | 33 | 3/8" | 19,73 |
| C2G0401000G | 70 | 80 | 40 | 1000 | 1160 | 23 | 50 | 33 | 3/8" | 23,51 |
| C2H0400200G | 80 | 92 | 40 | 200 | 380 | 25 | 60 | 35 | 1/2" | 11,08 |
| C2H0400250G | 80 | 92 | 40 | 250 | 430 | 25 | 60 | 35 | 1/2" | 12,22 |
| C2H0400300G | 80 | 92 | 40 | 300 | 480 | 25 | 60 | 35 | 1/2" | 13,35 |
| C2H0400400G | 80 | 92 | 40 | 400 | 580 | 25 | 60 | 35 | 1/2" | 15,56 |
| C2H0400500G | 80 | 92 | 40 | 500 | 680 | 25 | 60 | 35 | 1/2" | 17,77 |
| C2H0400600G | 80 | 92 | 40 | 600 | 780 | 25 | 60 | 35 | 1/2" | 19,98 |
| C2H0400800G | 80 | 92 | 40 | 800 | 980 | 25 | 60 | 35 | 1/2" | 24,50 |
| C2H0401000G | 80 | 92 | 40 | 1000 | 1180 | 25 | 60 | 35 | 1/2" | 28,92 |
| C2H0500200G | 80 | 92 | 50 | 200 | 380 | 25 | 60 | 35 | 1/2" | 12,35 |
| C2H0500250G | 80 | 92 | 50 | 250 | 430 | 25 | 60 | 35 | 1/2" | 13,73 |
| C2H0500300G | 80 | 92 | 50 | 300 | 480 | 25 | 60 | 35 | 1/2" | 15,15 |
| C2H0500400G | 80 | 92 | 50 | 400 | 580 | 25 | 60 | 35 | 1/2" | 17,95 |
| C2H0500500G | 80 | 92 | 50 | 500 | 680 | 25 | 60 | 35 | 1/2" | 20,71 |
| C2H0500600G | 80 | 92 | 50 | 600 | 780 | 25 | 60 | 35 | 1/2" | 24,00 |
| C2H0500800G | 80 | 92 | 50 | 800 | 980 | 25 | 60 | 35 | 1/2" | 29,50 |
| C2H0501000G | 80 | 92 | 50 | 1000 | 1180 | 25 | 60 | 35 | 1/2" | 35,00 |
| C2I0500200G | 100 | 115 | 50 | 200 | 410 | 25 | 82 | 38 | 1/2" | 19,50 |
| C2I0500250G | 100 | 115 | 50 | 250 | 460 | 25 | 82 | 38 | 1/2" | 21,50 |
| C2I0500300G | 100 | 115 | 50 | 300 | 510 | 25 | 82 | 38 | 1/2" | 23,00 |
| C2I0500400G | 100 | 115 | 50 | 400 | 610 | 25 | 82 | 38 | 1/2" | 26,50 |
| C2I0500500G | 100 | 115 | 50 | 500 | 710 | 25 | 82 | 38 | 1/2" | 30,00 |
| C2I0500600G | 100 | 115 | 50 | 600 | 810 | 25 | 82 | 38 | 1/2" | 33,50 |
| C2I0500800G | 100 | 115 | 50 | 800 | 1010 | 25 | 82 | 38 | 1/2" | 40,50 |
| C2I0501000G | 100 | 115 | 50 | 1000 | 1210 | 25 | 82 | 38 | 1/2" | 47,50 |
| C2I0600300G | 100 | 115 | 60 | 300 | 510 | 25 | 82 | 38 | 1/2" | 25,50 |

Top Speed (Limite di Velocità): 0.5m/s max.

Continuous Pressure (Pressione Continua): 140bar max.
Peak Pressure (Pressione di picco): 250bar max.

Temperature C°: -25°C + 80°C

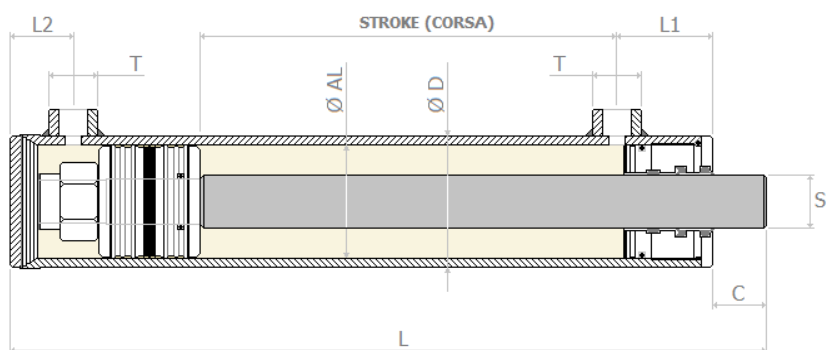

CILINDRO DOPPIO EFFETTO – DOUBLE ACTING CYLINDER

| Code (Codice) | Ø AL | Ø D | Ø S | STROKE (Corsa) | L | C | L1 | L2 | E | Weight Kg |
|--------------------|------|-----|-----|----------------|------|----|----|----|------|-----------|
| C2I0600400G | 100 | 115 | 60 | 400 | 610 | 25 | 82 | 38 | 1/2" | 29,50 |
| C2I0600500G | 100 | 115 | 60 | 500 | 710 | 25 | 82 | 38 | 1/2" | 33,50 |
| C2I0600600G | 100 | 115 | 60 | 600 | 810 | 25 | 82 | 38 | 1/2" | 37,50 |
| C2I0600800G | 100 | 115 | 60 | 800 | 1010 | 25 | 82 | 38 | 1/2" | 46,00 |
| C2I0601000G | 100 | 115 | 60 | 1000 | 1210 | 25 | 82 | 38 | 1/2" | 54,50 |